




**FC500RE-\***

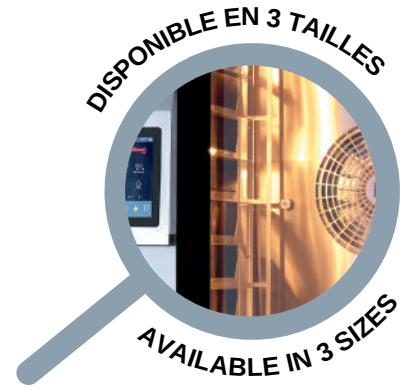

**5 levels**

**400 x 600 - 400 x 800 ou 600 x 800 mm**

- LCD control panel
- Step between trays : 80 mm
- Max. temperature : 300°C
- Stainless steel body
- Glass door
- Lighting
- Timer
- General switch
- Steam generator
- 1 heating fan
- Fan speed regulation  
400/50-60Hz/3



Options :

- Motorized hood
- Support with slides
- Proofer with glass doors (from 30 to 90°C)
- Programmable panel (99 prog/10 phases) on touch screen
- Automatic closing on touchscreen model
- Self-cleaning module on touchscreen model
- Loading system
- Self-cleaning system for the oven, consult us

**5 niveaux**

**400 x 600 - 400 x 800 ou 600 x 800 mm**

- Commandes LCD
- Pas de : 80 mm
- Température max. : 300°C
- Construction inox
- Porte vitrée
- Eclairage
- Minuterie
- Interrupteur général
- Humidificateur
- 1 turbine de chauffage
- Régulation de la vitesse de la turbine  
400/50-60Hz/3




Options :

- Hotte motorisée
- Support à glissières
- Étuve vitrée (de 30 à 90°C)
- Commandes programmables (99 prog / 10 phases)  
sur modèle tactile
- Fermeture automatique sur modèle tactile
- Module d'auto-nettoyage sur modèle tactile
- Système de chargement
- Système d'auto-nettoyage de l'étuve nous consulter

	400 x 600 mm	400 x 800 mm	600 x 800 mm
<b>Largeur / Width</b>	780 mm	780 mm	930 mm
<b>Profondeur / Depth</b>	1080 mm	1280 mm	1280 mm
<b>Hauteur / Height</b>	670 mm	670 mm	670 mm



**FC500RE-LCD**



**FC500RE-T**



OPTION : Etuve vitrée  
OPTION : Glassed proofer



OPTION : support avec glissières  
OPTION : support with slides